

# 90° HYBRID

## SURFACE MOUNT MODEL: SMQ-C21

**OCTAVE BANDWIDTH**

**104 - 176 MHz**

**FEATURES:**

- ▶ Excellent Performance
- ▶ Small Size, Surface Mount
- ▶ Building Block For:
  - Power Amplifiers
  - Image Rejection Mixers
  - I & Q / SSB Modulators
  - Phase Shifters & More...



**SPECIFICATIONS (Rev. A 02/25/08)**

<b>Frequency</b>	104 - 176 MHz	
<b>Insertion Loss (dB) *</b>	Typ.	Max.
	0.3	0.7
<b>Amplitude Unbalance</b>	Typ.	Max.
	0.2	0.6
<b>Phase Unbalance</b>	Typ.	Max.
	1°	2.5°
<b>Isolation (dB)</b>	Typ.	Min.
	30	20
<b>Power Rating</b>	1 Watt (Max.)	
<b>Impedance</b>	50 Ohms (Nom.)	
<b>VSWR</b>	1.1:1 (Typ.)	
<b>Operating Temperature Range</b>	-40 to +85 °C	
<b>Storage Temperature Range</b>	-55 to +100 °C	

\* Insertion loss in excess of the theoretical 3 dB coupling.

<b>Package #</b>	<b>129</b>
------------------	------------

Port Configuration					
Input	Isolated*	+90° Output	0° Output	GND.**	No Conn.
5	6	1	2	7,8,9,10	3,4

\* Terminate ISOLATED port in 50 Ohms EXTERNALLY.  
\*\* Ground Externally



# 90° HYBRID

## SURFACE MOUNT MODEL: SMQ-C21

OCTAVE BANDWIDTH

104 - 176 MHz

Data @ 25°C

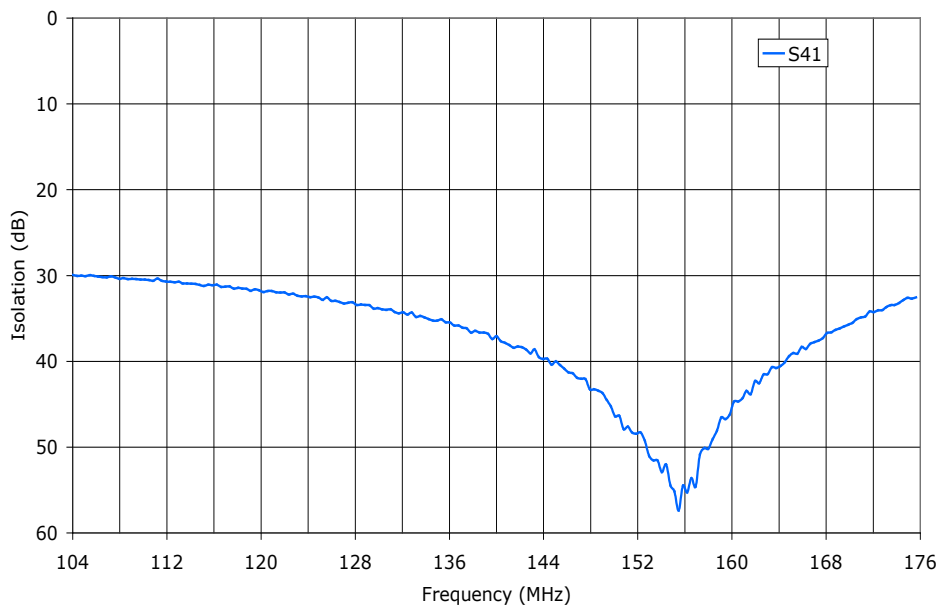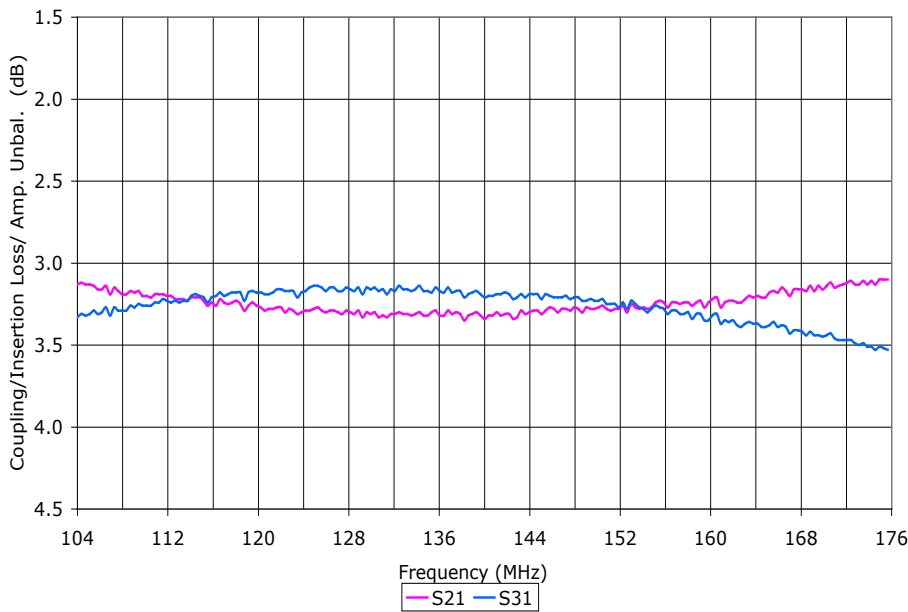

PERFORMANCE PLOTS



# 90° HYBRID

## SURFACE MOUNT MODEL: SMQ-C21

OCTAVE BANDWIDTH

104 - 176 MHz

Data @ 25°C

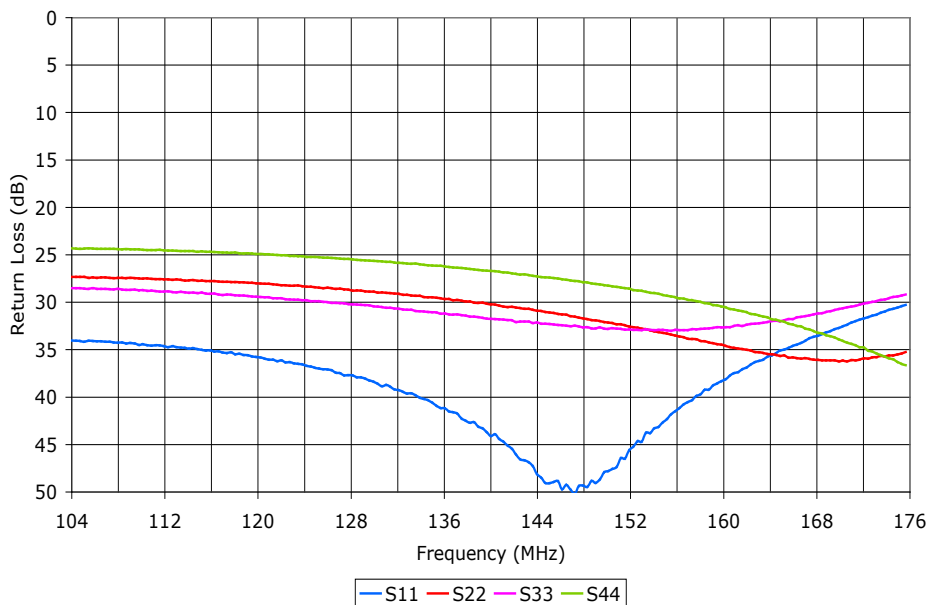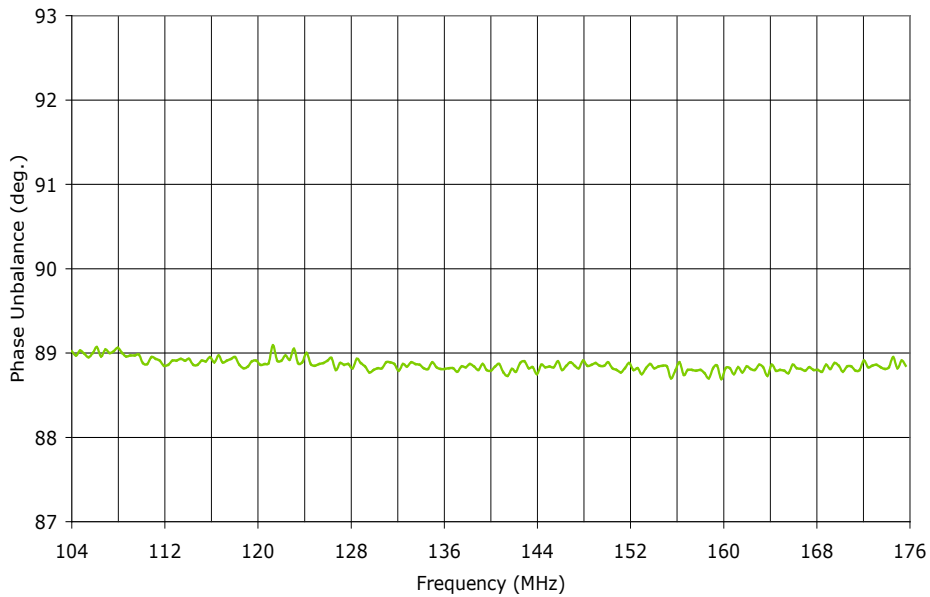

PERFORMANCE PLOTS


# 90° HYBRID

## SURFACE MOUNT MODEL: SMQ-C21

OCTAVE BANDWIDTH

104 - 176 MHz

Data @ 25°C

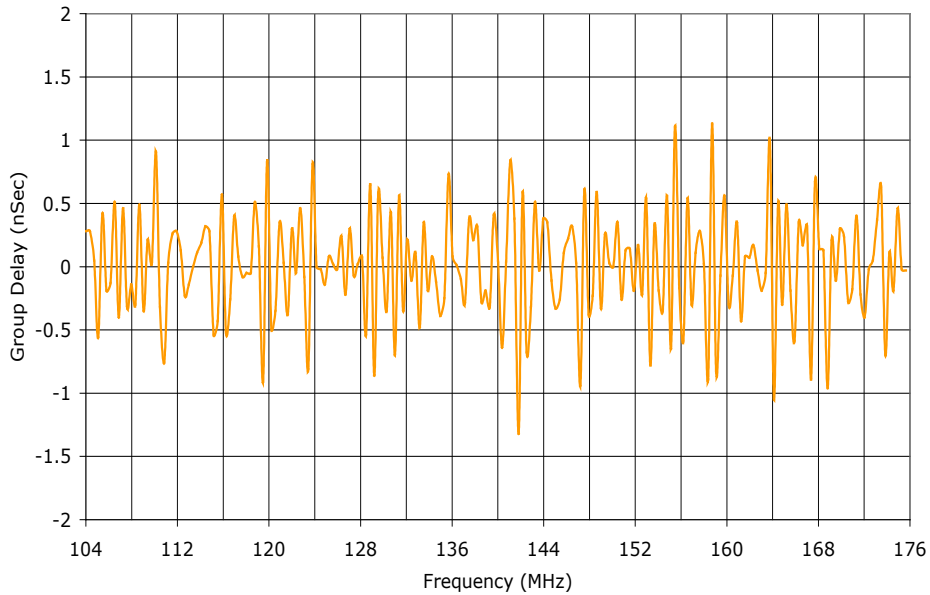

PERFORMANCE PLOTS